

My signature certifies that the measurements entered on this specification sheet are accurate and I assume responsibility for the accuracy. Revision # _____


Kodiak Motorsports

Phone: (877) 856-7311 Fax: (604) 850-2078

Signature _____

NAME _____

PHONE NUMBER _____

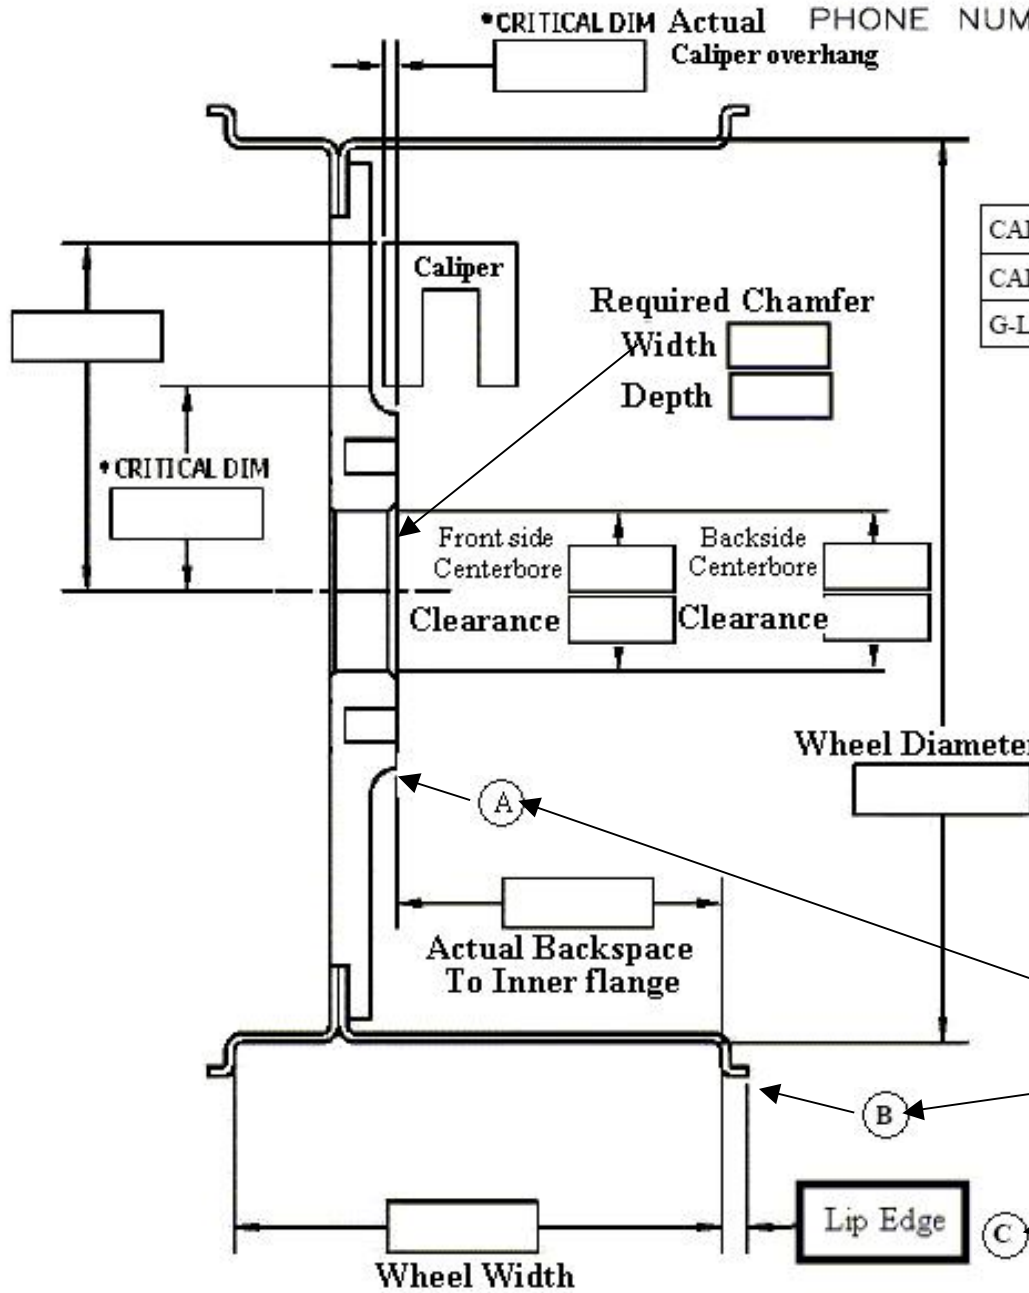

CAR TYPE	
CAR WEIGHT	
G-LOAD CAPACITY	

Measuring backspace:
from Hub mounting surface to Inner Flange

The backspace measurement is the distance from the hub-mounting surface (A), To the outside edge of the inner shell (B), Minus the lip edge measurement (C).

FRONT
QTY

REAR
QTY

FOR ALL WHEELS	
WHEEL CENTER FINISH	POLISHED, BLACK, RED, GOLD
WHEEL RIMS FINISH	POLISHED
WHEEL STYLE	FX , STX , RT , S-5
Standard wheel CENTER & RIM finish is POLISHED.	

Valve core style: Rubber standard, metal optional.
Some wheel fitment packages utilize rubber only.

FOR CENTER-LOCK WHEELS

STUB AXLE END OF THREADS	
STUB AXLE START OF THREADS	
CENTER-LOCK WASHER THICKNESS	
LENGTH OF STUB AXLE	
CENTER LOCK WASHER DIA.	
ACTUAL DRIVE PIN DIA.	
DRIVE PIN DEPTH	
DRIVE PIN BOLT CIRCLE	
DRIVE PIN QTY.	

Please Note: Chosen finishes may alter the dimensions slightly. Please take this into consideration when filling out this spec sheet.
EG. Anodizing reduces the bore size by .003 inches.